



440


CONTINUOUS LEVEL TRANSMITTER 2 wire configuration




TECHICAL CHARACTERISTICS

- **Sensor working:** capacitive
- **Probe body:** see table " order codes "
- **Thread:** 1/2" GAS
- **Electric wiring:** according to DIN 43650-A with PG11 cable gland
- **Protection class:** IP65
- **Electrode:** stainless steel \varnothing 8mm L=1000mm (standard)
- **Covering:** 1 mm thick PTFE
- **Temperature:** 120 °C on the electrode
- **Pressure:** 25 bar
- **Weight:** 1200 gr (for L=1000mm)
- **Power supply:** 13 ÷ 30 V d.c. according to resistive load
- **Absorption:** 0.6 VA
- **Output:** 4 ÷ 20 mA, 2 wire configuration (see wiring diagram)
- **Precision:** 0,5% f.s. after calibration
- **Plug:** 15mm not-sensitive end, at the bottom
- **Product controlled:** water, oil, diesel fuel, liquids and powders


MECHANICAL DIMENSIONS

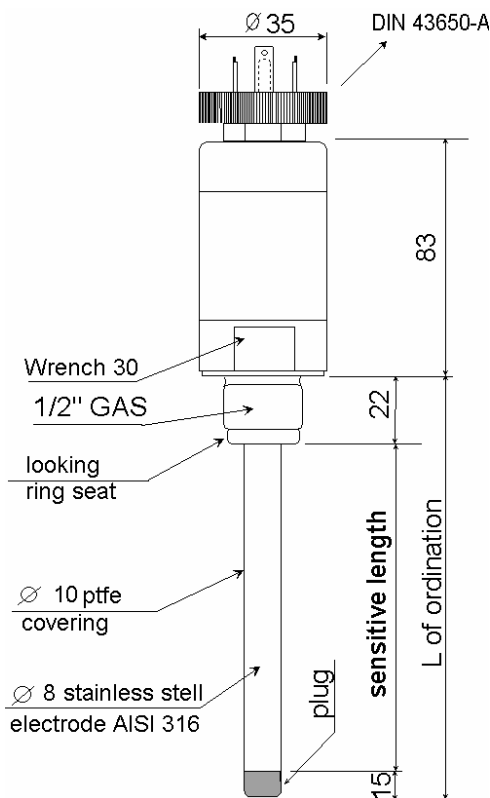

METAL TANK - WIRING DIAGRAM

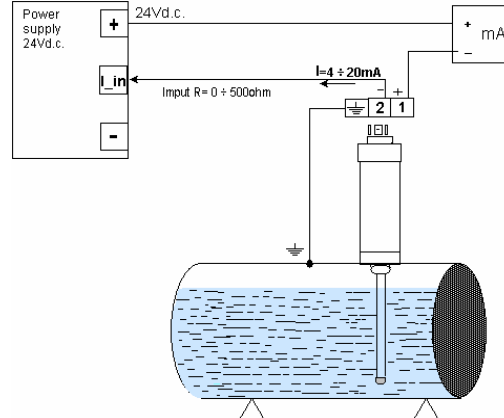

INSULATING TANK - WIRING DIAGRAM

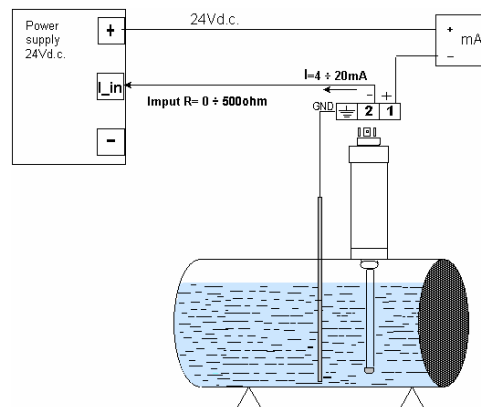

ORDER CODES

CODE	TEMPERATURE	PRESSURE	THREAD	ELECTRODE	NOTE S
440-005-04	120 °C	25 bar	1/2 " stainless steel AISI 303- POM	stainless steel; for L up to 500mm	
440-010-04	120 °C	25 bar	1/2 " stainless steel AISI 303- POM	stainless steel; for L up to 1000 mm	
440-015-04	120 °C	25 bar	1/2 " stainless steel AISI 303- POM	stainless steel; for L up to 1500 mm	
440-020-04	120 °C	25 bar	1/2 " stainless steel AISI 303- POM	stainless steel; for L up to 2000 mm	
447-015-04	120 °C	25 bar	1/2 " stainless steel AISI 316- POM	stainless steel; for L up to 1500 mm	
448-010-04	120 °C	25 bar	1/2 " PTFE-glass - POM	stainless steel; for L up to 1000 mm	