



230

ELECTRONIC SELF-TESTING LEVEL SWITCH ALARM AND BLOCK FOR MINIMUM LEVEL

Compliant Directive 2014/68/UE (PED) - certified B+D

TECHNICAL CHARACTERISTICS





DIN




Panel

- safety integrity level: **SIL2 / SIL3**
- electronic working, microcontroller
- double conductivity measure circuit, with compensation electrode
- 6 different self testing , every 60"
- output - relay: two contacts in exchange, 230V – 2.5A-AC1
- positive –safety circuit burner block
- alarm codes: numeric display
- minimum water conductivity: 0.5 $\mu\text{S}/\text{cm}$
- manual test switches: standard
- power consumption: 3VA
- DIN rail/panel mounting
- **999-230-00**: option for auxiliary service relay + RS-485

MECHANICAL DIMENSION




DIN



Panel

WIRING DIAGRAM

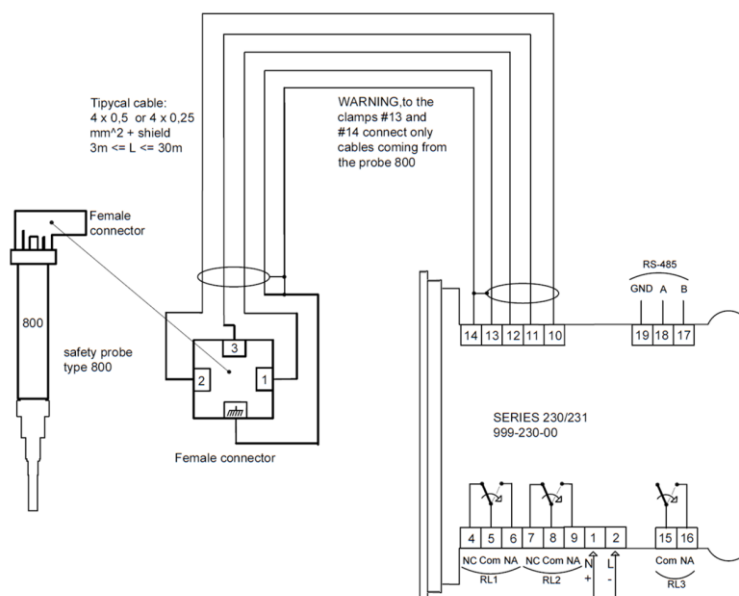

ORDERING CODES

CODICE	CHARACTERISTICS	POWER SUPPLY (+10%÷-15%)
230-110-0X	DIN - SIL2 - Conductivity >10 $\mu\text{S}/\text{cm}$	X =8 (110 ÷ 230Vac)
230-210-0X	DIN - SIL3 - Conductivity >10 $\mu\text{S}/\text{cm}$	X =8 (110 ÷ 230Vac) - X =9 (24Vac); (24Vdc)
230-110-1X	Panel - SIL2 - Conductivity >10 $\mu\text{S}/\text{cm}$	X =8 (110 ÷ 230Vac)
230-210-1X	Panel - SIL3 - Conductivity >10 $\mu\text{S}/\text{cm}$	X =8 (110 ÷ 230Vac) - X =9 (24Vac); (24Vdc)
999-230-00	option auxiliary service relay + RS-485	24V-AC/DC-100mA

Information provided herein can be changed without notice.

[Cat_E_230_AUX.doc] dic-25